



ZIVA

PERFECT SYNTHESIS BETWEEN QUALITY AND ESSENTIALITY



EXPERIENCE AND INNOVATION
SINCE 1948




ZIVA

DENTAL LED ROOM LIGHT

THE ESSENTIAL QUALITY FOR OPERATIONAL AND AESTHETIC NEEDS

Developed through the constant research by FARO for **innovative and performing solutions** for the dentist office, **ZIVA** is the ceiling light designed to satisfy operative and aesthetic requirements of the dentist office. The careful and scrupulous **selection of materials and components**, along with the **care for detail**, make ZIVA the perfect synthesis between quality and essentiality.

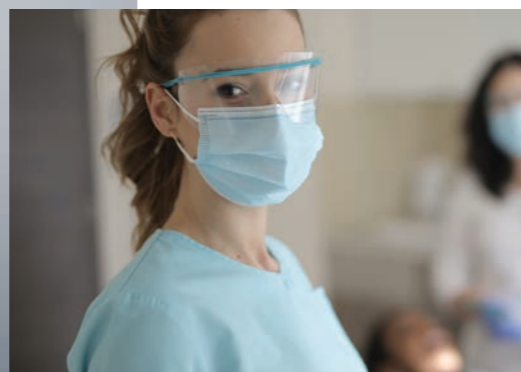

HOMOGENEOUS LIGHTING WITHOUT SHADOW AREAS

The ZIVA dental ceiling light used latest generation technologies that allow for **homogeneous lighting that is proportional to the work environment, reducing both the shadow areas** as well as operator **stress and visual fatigue**. The ideal solution for those that are searching for a ceiling light with high level performance at a competitive price.

The colour **rendition index > 90** and the **colour temperature** of 5.500 K, allow for an **actual determination of colouration** and greater definition of **details**.

USE 2.0 APP "ZIVA"


IT IS THE APP AVAILABLE FOR iOS AND ANDROID THAT ALLOWS THE OPERATOR TO SELECT THE OPTIMAL LIGHT LEVEL AND CREATE CUSTOM SCENARIOS THAT CAN BE STORED AND RECALLED AT ANY TIME.




MAGNETIC FASTENING SYSTEM

Changing has never been so easy. The innovative **magnetic fastening system** makes ceiling installation extremely easy and intuitive, in the same way the **"Suspension kit"*** makes it possible to easily convert **ZIVA** into a suspension ceiling light.

This **dual installation mode** allows to place **ZIVA** on **any type of ceiling**, making it possible to modernize the image of the dental office, making it a modern, elegant and functional environment.

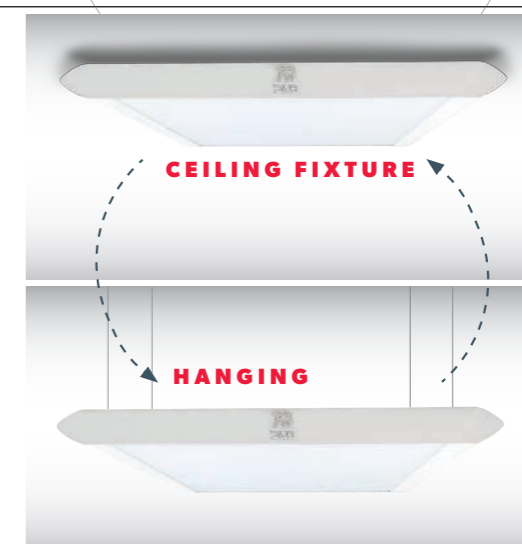

TECHNICAL FEATURES

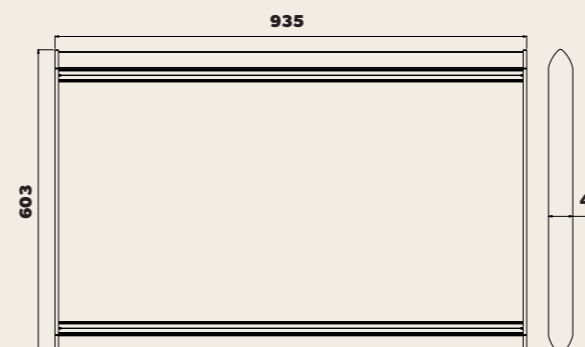

TECHNICAL SPECIFICATIONS**	ZIVA
POWER SUPPLY VOLTAGE	220/240 Va - 50/60 Hz
POWER ABSORBED	Max 240 W
DIMENSIONS	935x603x48 mm
WEIGHT	8 Kg
LIGHTING	Up to 3.100 Lux (at a distance of 1.45 m)
COLOUR TEMPERATURE	5.500 K
COLOUR RENDERING INDEX	> 90

* Optional

** (The technical data given represent typical values subject to tolerance)

Product in Compliance with Directive 2015/53/EU



EXPERIENCE AND INNOVATION
SINCE 1948

FARO S.p.A.

Via Faro, 15 - 20876 Ornago (MB)
Italy
Tel. +39 039.68781
www.faro.it
export@faro.it

FARO FRANCE

Avenue de l'Europe - 71 210 ECUISSES
France
Tel. +33 385.779680
www.farofrance.com
farofrance@farofrance.com

FARO DEUTSCHLAND GMBH

Gewerbepark Heideckhof Heideckstr. 179
D-47805 Krefeld - Germany
Tel. +49 2151.936921
www.farodeutschland.de
info@farodeutschland.de

INFO LINE:

